

WAFER CHECK VALVES

AMCO



INSTALLATION

The Short face to face dimensions and the low weight guarantee a simple and space saving installation between bolts of connecting flanges. Flange sealing is obtained by O-rings, hence no gaskets required.

MATERIAL SPECIFICATIONS

Body and Disc :

Cast Iron I.S. 210 Gr. Fg 260


Cast Steel ASTM A 216 Grade WCB

Cast Stainless Steel ASTM A351 Gr CF 8 / CF 8M
AISI 304 & 316


Seat / Body 'O' rings: Nitrile, EPDM, Viton, Silicone, PTFE

OTHER MATERIALS AVAILABLE ON SPECIAL REQUEST.

DIMENSIONS

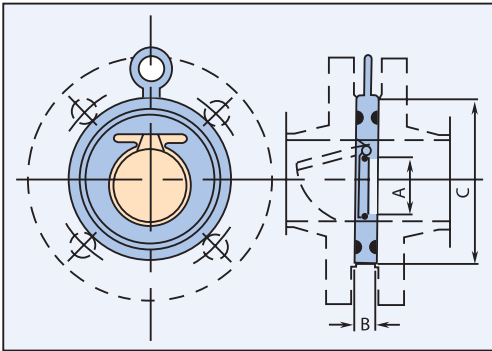

Pressure loss diagram

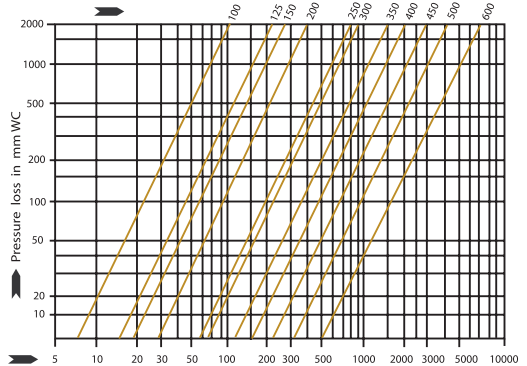

DIMENSIONS IN MM

DN	25	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
A	15	24	30	40	52	71	93	114	157	195	230	270	310	360	406	490
B	12	12	14	14	14	14	16	19	28	28	38	41	51	51	60	70
C (Table D)	68	85	98	111	130	162	193	219	276	336	387	448	499	562	619	730
C (PN 10)	73	94	109	129	144	164	194	220	275	330	380	440	491	541	596	698
C (PN 16)	73	94	109	129	144	164	194	220	275	331	386	446	498	558	620	737
C ASA 150	65	84	103	123	136	174	195	220	278	340	410	451	511	549	606	770

AMCO INDUSTRIAL VALVES

MANUFACTURERS • IMPORTERS • EXPORTERS

OFFICE: #6, Thandava Murthy Street, Royapuram, Chennai - 600 013.

WORKS: # 104 - A, East Mada Church Street, Royapuram, Chennai - 600 013.

OFF: 2590 1646, 2590 0443. WORKS: 2595 4858. Telefax: 2590 1646

WEBSITE: www.amcovalves.com E-MAIL: amcovalves@hotmail.com / amcovalves@yahoo.com

AUTHORISED DEALERS